

### **RIVAL SERIES**



### INTRODUCTION



02 PART TWO SPECIFICATIONS

03 PART THREE OPTICAL FEATURE

04 PART FOUR DIMENSION FIGURE

05 PART FIVE PRODUCT DETAIL

06 PART SIX PACKAGE DETAIL



### **Product Advantage**

### IMPORTED LG 3030 LED CHIPS

Maximum brightness up to 150lm/W, 30% higher than similar products.

### INTEGRAL DIE-CAST HOUSING

High mechanical strength, up to 16 typhoon resistance.





### ADJUSTABLE ANGLE LAMP ARM

Can be used in 2 different types of lamp pole.



Convenient for battery and controller maintenance, save maintenance costs.

# 

### **Product Advantage**

### **Product Advantage**


### LAMP BEAD TYPES


Two different types of lamp beads to choose from.




#### PART TWO | SPECTFICATIONS


Model	AN-ISSL-C			
Power	60W	80W	100W	
LED	200/144pcs	300/216pcs	400/288pcs	
Luminous Flux		150lm/w		
LiFePO4 Battery	128WH	160WH	192WH	
Mono Solar Panel	30W	40W	50W	
Solar Charging Time	5-6 hours by bright sunlight			
Lighting Time In Rainy Day	5 days			
Lighting Mode	3hrs 100%+2hrs 70%+5hrs 50%+2hrs 25% Can be customized based on customer needs			
Material	Aluminium alloy + PMMA			
IP Class	IP 65			
Work Temperature	0°C to 50°C			

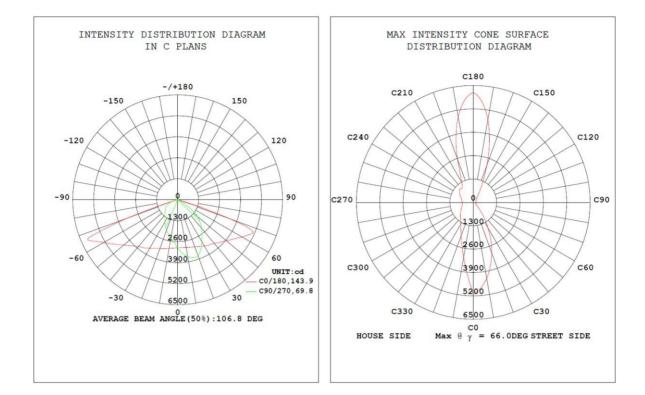

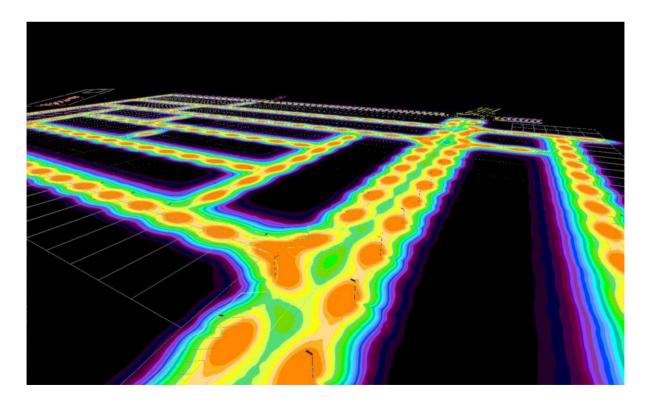


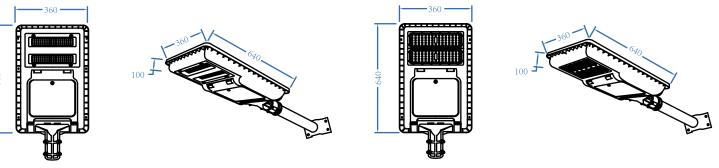


AN-ISSL-C-60W




š Š

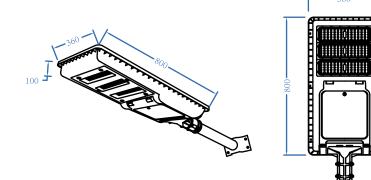



AN-ISSL-C-80W

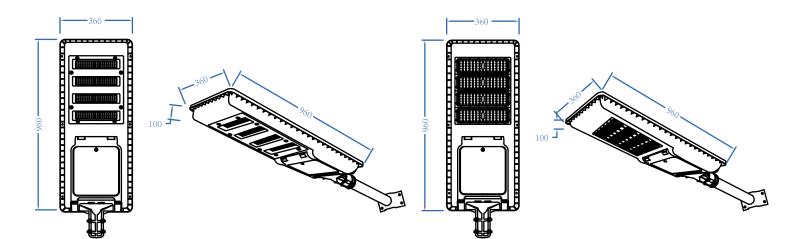

AN-ISSL-C-100W



Monocrystalline solar panels 22% conversion efficiency



LiFePo4 battery long lifespan and big capacity Metal switch one button start



## THANKS VERY MUCH